

# Harlequin Activity™

**Harlequin Activity** is a permanently installed sprung floor system, based on the well-established 'triple sandwich' construction originated by Harlequin over 35 years ago. It's a fully-floating system with no fixings to the sub-floor and can be laid on any reasonably smooth and flat surface without prior preparation.

**Harlequin Activity** is shock-damped to avoid a 'trampoline' effect and provides area and point elasticity to offer identical characteristics across the whole floor. It is an 'industry standard' choice with many hundreds of installations worldwide, effectively reducing injuries to both teachers and performers.

**Harlequin Activity** is installed by our own highly-skilled technical team and all work is fully guaranteed. Different surface options include:


- A Harlequin vinyl performance floor, selected from our range
- Solid hardwood - in beech, oak or maple
- Engineered board with a hardwood wear layer - in beech, oak or maple.

If a Harlequin vinyl performance floor is chosen, a colour matched composite edging profile will be installed around the finished edges. If solid hardwood or engineered board is chosen, the skirting will be 'optional'.



## Specification guide

Permanent or Portable	Permanent
Minimum floor thickness (before inclusion of chosen finish)	46mm vinyl, 38mm wood
Minimum floor weight (before inclusion of chosen finish)	14.1kg/m <sup>2</sup>
Testing standards	BS EN 14904:2006
Average shock absorption	64%
Maximum point load (BS EN 1195)	549kg
Area deflection	7.2%
Rolling load	>1500N
Vertical deformation	4.9mm

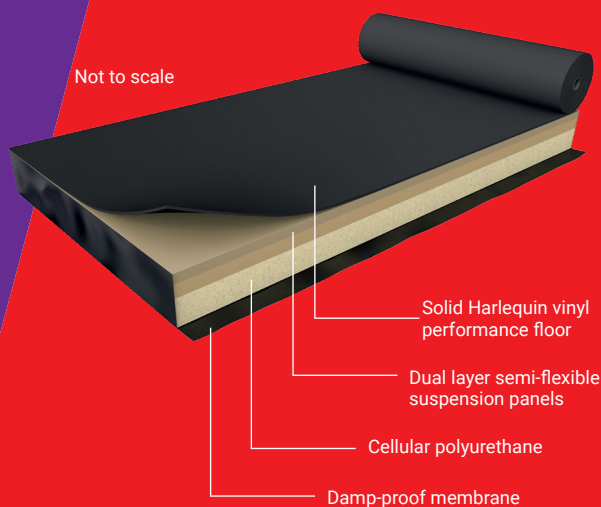

If you would like further information, advice and samples please contact us on +44(0) 1892 514 888 or [enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)