

Harlequin Flexity™


Harlequin Flexity is a cost-effective, self-install sprung floor panel system, designed for permanent or semi-permanent installation. Panels are laid in a brickwork fashion onto the sub-floor, so that cross joints do not coincide. The panels join together by a special tongue and groove, which are glued together for permanent installation or fixed using woodscrews at predetermined points along the tongue and groove for a semi-permanent solution.

Harlequin Flexity can be installed by anyone with basic DIY skills and full instructions are provided. It's a cost-effective choice, helping to reduce the injury risks associated with dancing or performing on a hard, unsprung floor.


Harlequin Flexity is finished by choosing an appropriate Harlequin vinyl performance floor or an engineered wood finish.

Specification guide

Permanent or Portable	Permanent or Semi permanent
Floor panel size	1.125m x 2.250m
Dance surface size	1.089m x 2.214m
Minimum floor thickness (before inclusion of chosen finish)	37mm
Minimum floor weight (before inclusion of chosen finish)	11.85kg/m ²
Testing standards	BS EN 14904:2006
Average shock absorption	67%
Maximum point load (BS EN 1195)	1126kg
Rolling load	1500N
Vertical deformation	3.9mm

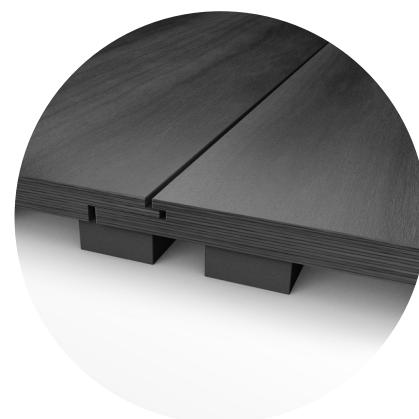

Not to scale

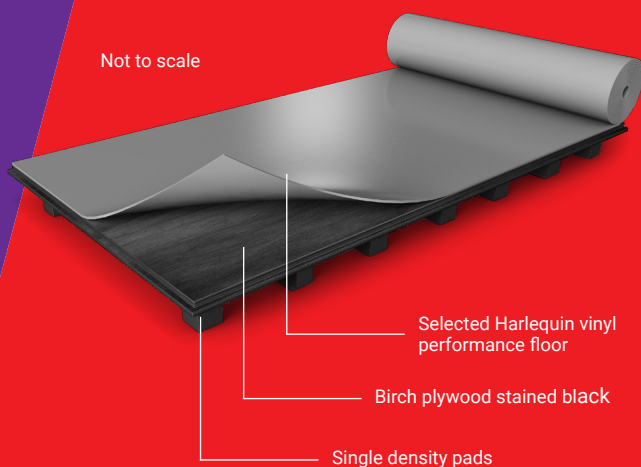

Selected Harlequin vinyl performance floor

Birch plywood stained black

Single density pads

Not to scale



Selected Harlequin engineered board

Birch plywood stained black

Single density pads

If you would like further information, advice and samples please contact us on +352 46 44 22
info@harlequinfloors.com



HARLEQUIN
www.harlequinfloors.com