

# Harlequin Flexity Plus™




**Harlequin Flexity Plus** is a cost-effective, self-install sprung floor panel system, designed for permanent or semi-permanent installation. Panels are laid in a brickwork fashion onto the sub-floor, so that cross joints do not coincide. The panels join together by a special tongue and groove, which are glued together for permanent installation or fixed using woodscrews at predetermined points along the tongue and groove for a semi-permanent solution.

**Harlequin Flexity Plus** can be installed by anyone with basic DIY skills and full instructions are provided. It's a cost-effective choice, helping to reduce the injury risks associated with dancing or performing on a hard, unsprung floor.

**Harlequin Flexity Plus** is finished by choosing an appropriate Harlequin vinyl performance floor or an engineered wood finish.

## Specification guide

Permanent or Portable	Permanent or Semi permanent
Floor panel size	1.125m x 2.250m
Dance surface size	1.089m x 2.214m
Minimum floor thickness (before inclusion of chosen finish)	37mm
Minimum floor weight (before inclusion of chosen finish)	11.85kg/m <sup>2</sup>
Testing standards	BS EN 14904:2006
Average shock absorption	67%
Maximum point load (BS EN 1195)	1126kg
Rolling load	1500N
Vertical deformation	3.9mm

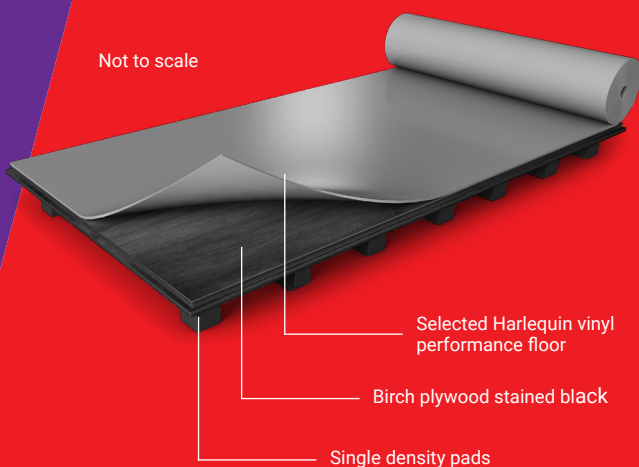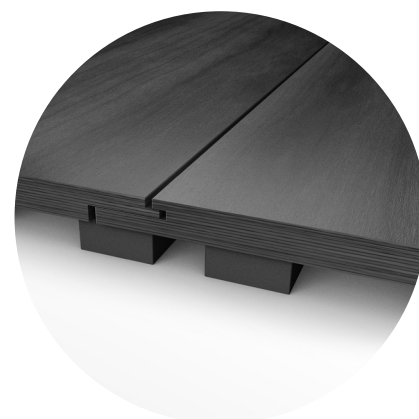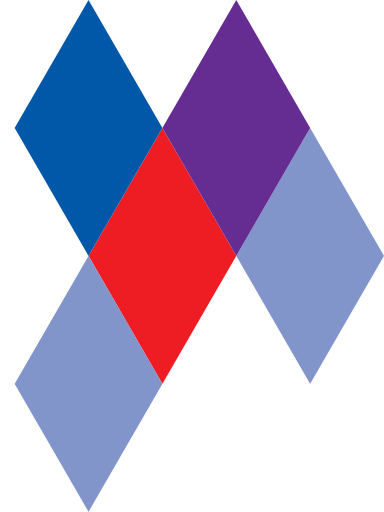

If you would like further information, advice and samples please contact us on +44(0) 1892 514 888 or [enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)



**HARLEQUIN**  
www.harlequinfloors.com