



# “The very best product on the market”

“Dance is a huge part of our performing arts programme and when it was time to renovate the Dance Room, we were prepared to pay for the very best product on the market. The floor was the first consideration and we had no hesitation in opting for Harlequin. We received a completely professional service with site visits to confirm measurements and discussed the various flooring options. The product was shipped in on time, the installers arrived on time and the floor was fitted on time. We are delighted with the end result. If Dance is 50% inspiration and 50% perspiration, the Harlequin floor has been 100% successful.

**David Toze**  
Superintendent ISM

”

A Harlequin Flexity sprung floor with a Harlequin Cascade performance vinyl surface and floor mounted double Harlequin Ballet Barres were installed at the International School Manila.

**0800 28 99 32**  
**[enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)**



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)

# Harlequin Flexity™



**Harlequin Flexity** is a cost-effective, self-install sprung floor panel system, designed for permanent or semi-permanent installation. Panels are laid in a brickwork fashion onto the sub-floor, so that cross joints do not coincide. The panels join together by a special tongue and groove, which are glued together for permanent installation or fixed using woodscrews at predetermined points along the tongue and groove for a semi-permanent solution.

**Harlequin Flexity** can be installed by anyone with basic DIY skills and full instructions are provided. It's a cost-effective choice, helping to reduce the injury risks associated with dancing or performing on a hard, unsprung floor.


**Harlequin Flexity** is finished by choosing an appropriate Harlequin vinyl performance floor or an engineered wood finish.

## Specification guide

Permanent or Portable	Permanent or Semi permanent
Floor panel size	1.125m x 2.250m
Dance surface size	1.089m x 2.214m
Minimum floor thickness (before inclusion of chosen finish)	37mm
Minimum floor weight (before inclusion of chosen finish)	11.85kg/m <sup>2</sup>
Testing standards	BS EN 14904:2006
Average shock absorption	67%
Maximum point load (BS EN 1195)	1126kg
Rolling load	1500N
Vertical deformation	3.9mm

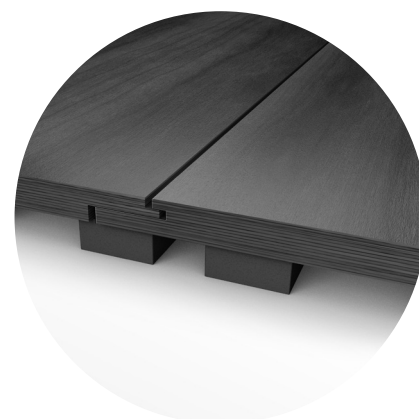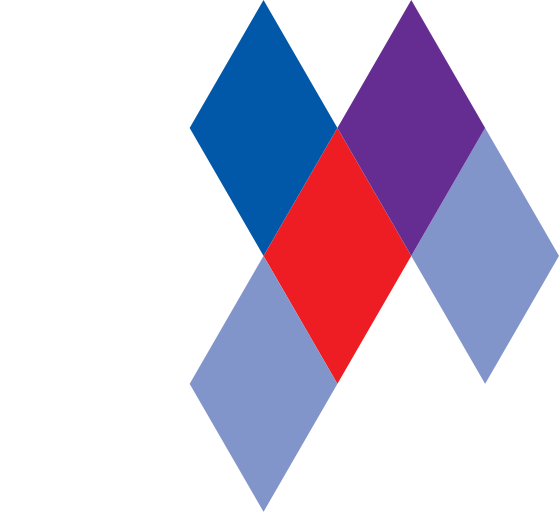

Not to scale

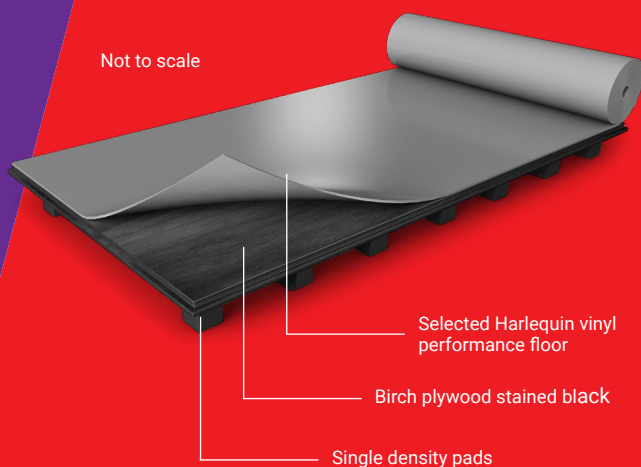

Not to scale



If you would like further information, advice and samples please contact us on +44(0) 1892 514 888 or [enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)